



CE RoHS

**Feature特征**

- Universal AC input/Full range  
国际通用全范围交流输入
- Protections: Short circuit/Over load  
短路保护, 过载保护
- Cooling by free air convection自然风冷
- High efficiency, long life and high reliability  
高效率, 长寿命和高可靠性
- Using 105°C long life electrolytic capacitors  
使用105度长寿命电容器
- 100% full load burn-in test 100%满载老化
- Installed with EMI filter, minimum wave  
内装EMI滤波器, 极小纹波

Specification性能	Model型号	T-150C			T-150D		
		Ch1	Ch2	CH3	Ch1	Ch2	CH3
Dc voltage 直流电压		5V	15V	-15V	5V	12V	24V
Rated current 额定电流		10A	5A	1.5A	8A	4A	2.5A
Current range 电流范围		0-10A	0-5A	0-1.5A	0-8A	0-4A	0-2.5A
Rated power 额定功率		150W			150W		
Ripple & noise 纹波和噪音	Note:1	80mVpp	150mVpp	150mVpp	80mVpp	150mVpp	150mVpp
Voltage ADJ. range 电压调整范围		+10%-5%			+10%-5%		
Voltage tolerance 电压精度	Note:2	±2.0%	±5.0%	±5.0%	±2.0%	±5.0%	±5.0%
Line regulation 线性调整率	Note:3	±0.5%	±1.5%	±1.5%	±0.5%	±1.5%	±1.5%
Load regulation 负载调整率	Note:4	±1%	±5%	±5%	±1%	±5%	±5%
Setup, rise, hold up time 启动, 上升, 保持时间		500ms, 50ms, 60ms/230VAC					
Input voltage range 输入电压范围		85-132VAC/170-264VAC, 47-63HZ, Selected by switch由开关选择					
Efficiency 效率		77%			79%		
Input current 输入电流		3.2A/115V 1.6A/230V					
Inrush current 浪涌电流		Cold start冷启动: 50A/230V					
Leakage current 漏电流		<3mA / 240VAC					
Overload protection 过载保护		105%-150%Rated output power; Type:Hiccup; Reset:auto recovery 105%-150%额定输出的功率; 模式: 打嗝模式; 复位: 自动恢复					
Working temp humidity 工作温度, 湿度		-25~+70°C, 20 ~ 90% RH					
Storage temp humidity 储存温度, 湿度		-40~+85°C, 10 ~ 95% RH					
Temp coefficient 温度系数		±0.03%/°C (0 ~ 50°C) (+5V)					
Vibration 耐振动		10 ~500Hz, 2G 10min/cycle周期, X、Y、Z Each axes轴各60min					
Withstand voltage 耐压性		I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
Isolation resistance 隔离电阻		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
Safety standards 安全标准		Meet UI1012 requirement ( Not apply for the mark ) 满足UL1012要求 ( 不申请标记 )					
EMC standards EMC标准		Meet FCC part 15J condition class B			满足FCC部分15J条件, 等级B		
Overall dimension 外形尺寸		199x110x50mm					
Weight 重量		0.85Kg					

Note:1. Ripple & noise are measured at 20MHZ of bandwidth by using 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor;

纹波和噪声测量方法: 20HZ带宽下测量, A12双绞线, 终端并0.1uF&47uF的电容器;

Note:2. Tolerance: includes set up tolerance, line regulation and load regulation;

精度: 包括设定误差, 线性调整率, 负载调整率;

Note:3. Line regulation is measured from low line to high line at rated load;


线性调整率测量方法: 在额定负载下, 从低电压到高电压测试;

Note:4. Load regulation is measured from 0% to 100% rated load.


负载调整率测量方法: 负载从0%到100%

■ Mechanical Specification 结构尺寸


Unit 单位: mm

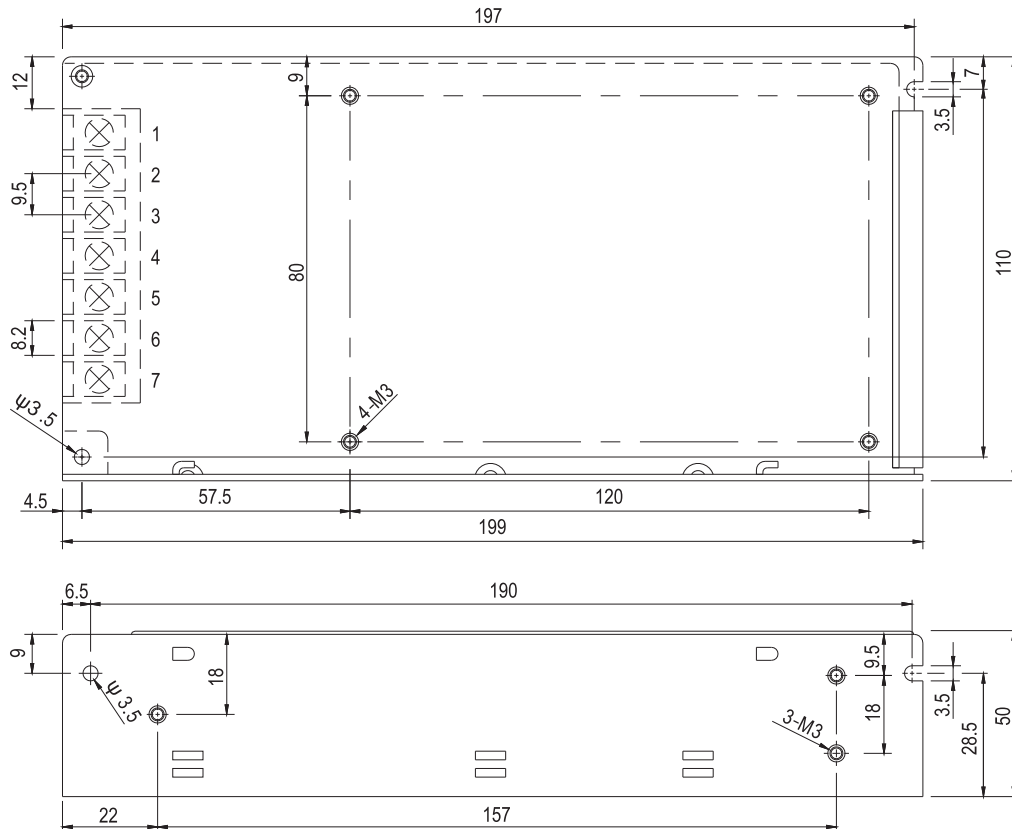

■ Derating Curve 降额曲线

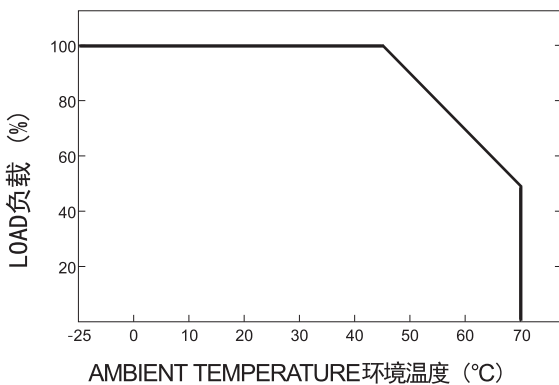

■ Output Derating VS Input Voltage 静态特性曲线

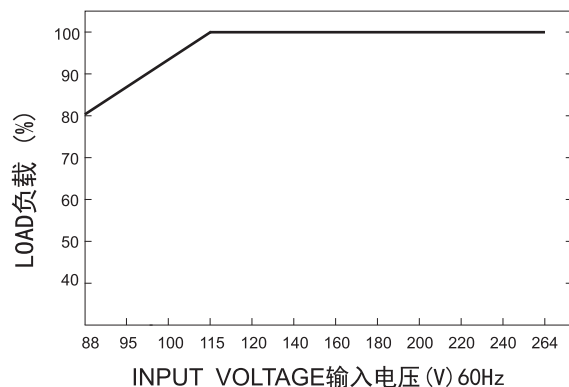

**浙江欧迪龙电子科技有限公司**  
Zhejiang Aotoro Electronic Technology CO.,LTD

ADD: Liuhuang Road 2188#, Liushi town, Yueqing city, Zhejiang province, PRC 325604  
浙江省乐清市柳市镇柳黄路2188号

TEL: 86-577-61758688 FAX: 86-577-62757002  
Http://www.aotoro.com E-mail: aotoro@aotoro.com